

Nessie® Power pack type PPH 4/6.3



Application

Nessie Power Pack PPH 4/6.3 is a compact and flexible supply unit designed for tap water hydraulic systems.

PPH 4/6.3 is primarily designed for the intermittent operation of simple cylinder and motor functions. PPH 4/6.3 distinguishes itself by its suitability for use in surroundings where a high

degree of corrosion resistance is required or where safety or environmental considerations require the use of alternative pressure media.

PPH 4/6.3 can also be used for continuous running applications. In such applications it might be necessary to use external cooling of the pressure media.

Design and function

PPH 4/6.3 incorporates a fixed displacement axial piston pump driven by an IEC 100 electric motor, a plastic water tank, a return filter for the pressure medium, and a VPH 15 E Power Pack Valve containing the following functions: relief valve (for setting the required pressure), a normally open, electrically activated 2/2-way valve (to provide a bypass function). The water tank contains monitors for temperature and level. The water level can also be checked visually (sight glass).

PPH 4/6.3 is supplied with a flexible coupling and bell housing to suit an IEC 100 (BF5 flange) electric motor. This size of motor gives a flexible Power Pack and thus facilitates optimisation of the hydraulic system. The Power Pack is supplied without a coil for the electrically activated bypass function. The performance range of the IEC 100 electric motor is 0.75 kW- 3 kW and 750-3000 rpm.


Performance

PPH 4/6.3 is available in the following versions:

1. 4 cc/rev. - 750 - 1500 rpm ** => 2.6 - 5.3 l/min
2. 6.3 cc/rev. - 750 - 1500 rpm ** => 4.1 - 8.4 l/min

** For speeds outside this range, please contact the Danfoss Sales Company.

Description

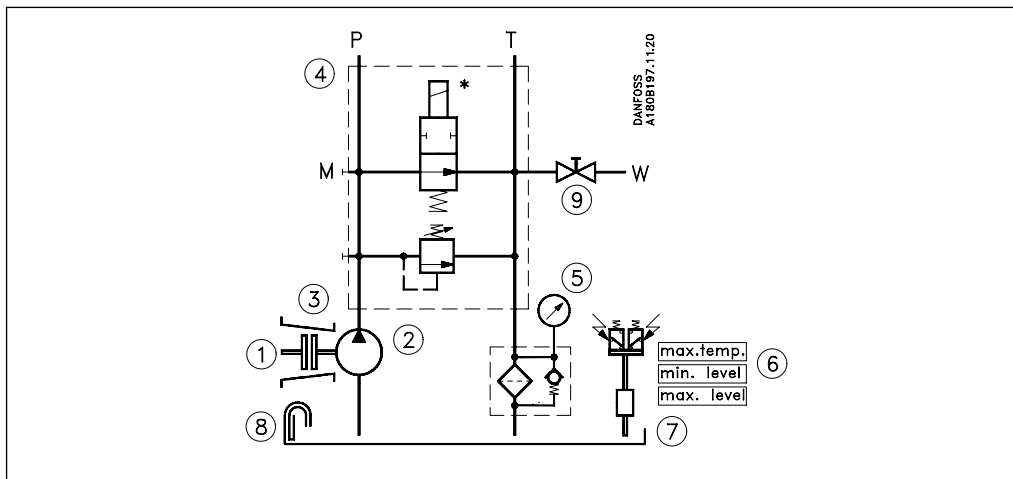

No.	Item	Description
1	Flexible coupling	For motor type IEC 100/B5 and pump shaft ISO R 755
2	Nessie PAH pump	Type PAH 4 or PAH 6.3
3	Bell housing	For motor IEC 100 and pump flange ISO 3019/2 - 80 A2 HW
4	VPH 15 E (15 l/min)	Power-pack-valve - 2/2-way directional valve incl. pressure relief valve
5	FRH	Return filter (10 µm) incl. pressure gauge, bypass and breather (3 µm)
6	Monitor device	Temperatur and level monitoring
7	Tank	Volume 27 l (net volume between min. and max. level: 9 l), material: plastic
8	Hose (transparent)	Tank drain, visual tank level monitoring
9	Ball valve	Filling device

*Directional valve without coil - please order seprately

Technical data

Variants		Performance		
Power pack		Motor	Max. flow	Pressure
Type		rev**	l/min	bar
PPH	4	750	2.6	25 - 140
PPH	4	1000	3.5	25 - 140
PPH	4	1500	5.3	25 - 140
PPH	6.3	750	4.1	25 - 140
PPH	6.3	1000	5.5	25 - 140
PPH	6.3	1500	8.4	25 - 140

**For speeds until 3000 rpm, please contact the Danfoss Sales Company.

Media temperature : min. +3°C - +50°C
Storage temperature : min. -40°C - +70°C

* In transport temperatures lower than -10°C, consideration must given to the reduced strength of plastic materials.

Filtration


The filling of water must take place through a separate filter with a filtration fineness of 10 µm abs., β₁₀ > 5000.

Technical data

Relief valve

Pressure setting range: 25 - 140 bar
Static characteristic:


Flow characteristic

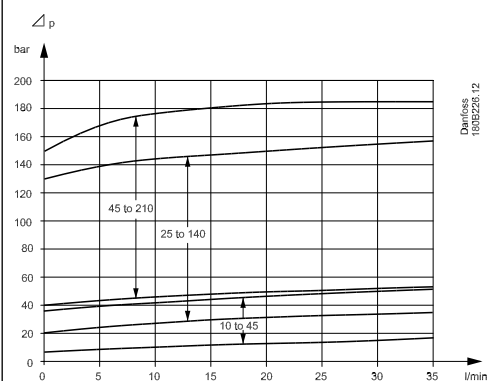

2/2-way valve

Max. pressure: 140 bar
Static characteristic:



pressure drop (P->T, bypass function)

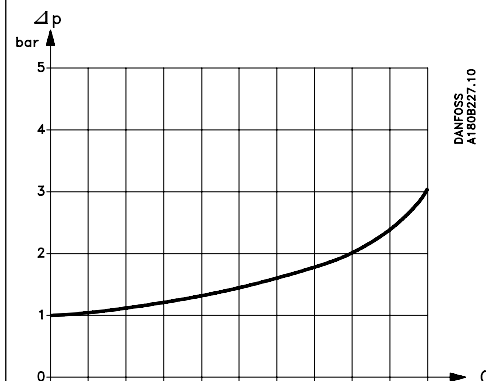

1. Heating up of power pack during continuous running without actuator activation (all flow through pressure relief valve) at different pressures. Electric motor speed = 1500 rpm

1. Heating up of power pack during continuous activation of bypass function. Electric motor speed = 1500 rpm

2. Cooling down of power pack during standstill

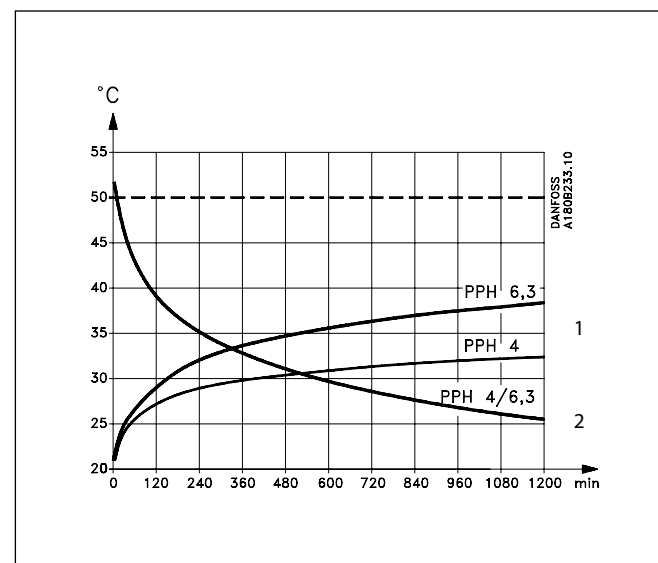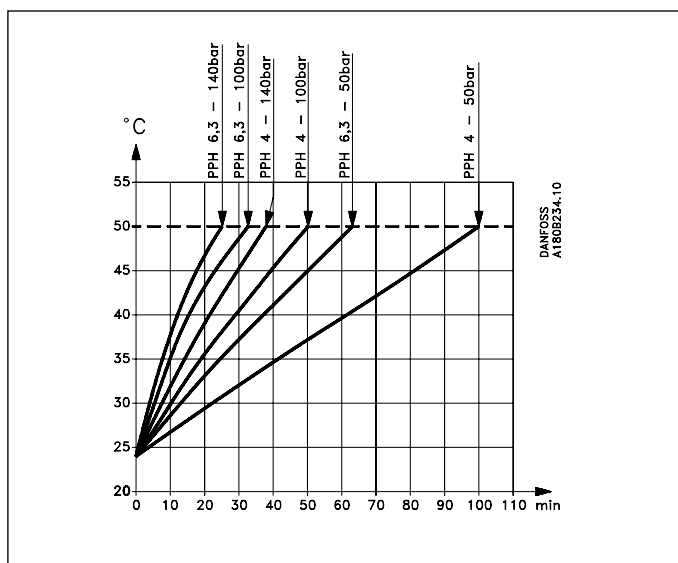


Code numbers

Power pack	Code numbers*
PPH 4	180B0299
PPH 6.3	180B0298

*Coil for bypass valve, please order separately

Coil	Code numbers
24 V / 50 Hz	018Z7920
220 V / 50 Hz	018Z7921
240 V / 50 Hz	018Z7924
24 V / 60 Hz	018Z7922
110 V / 60/50 Hz	018Z7923
12 V d.c.	018Z7913
24 V d.c.	018Z7914
220 V / 50 Hz EEX	018Z7992

Dimensions

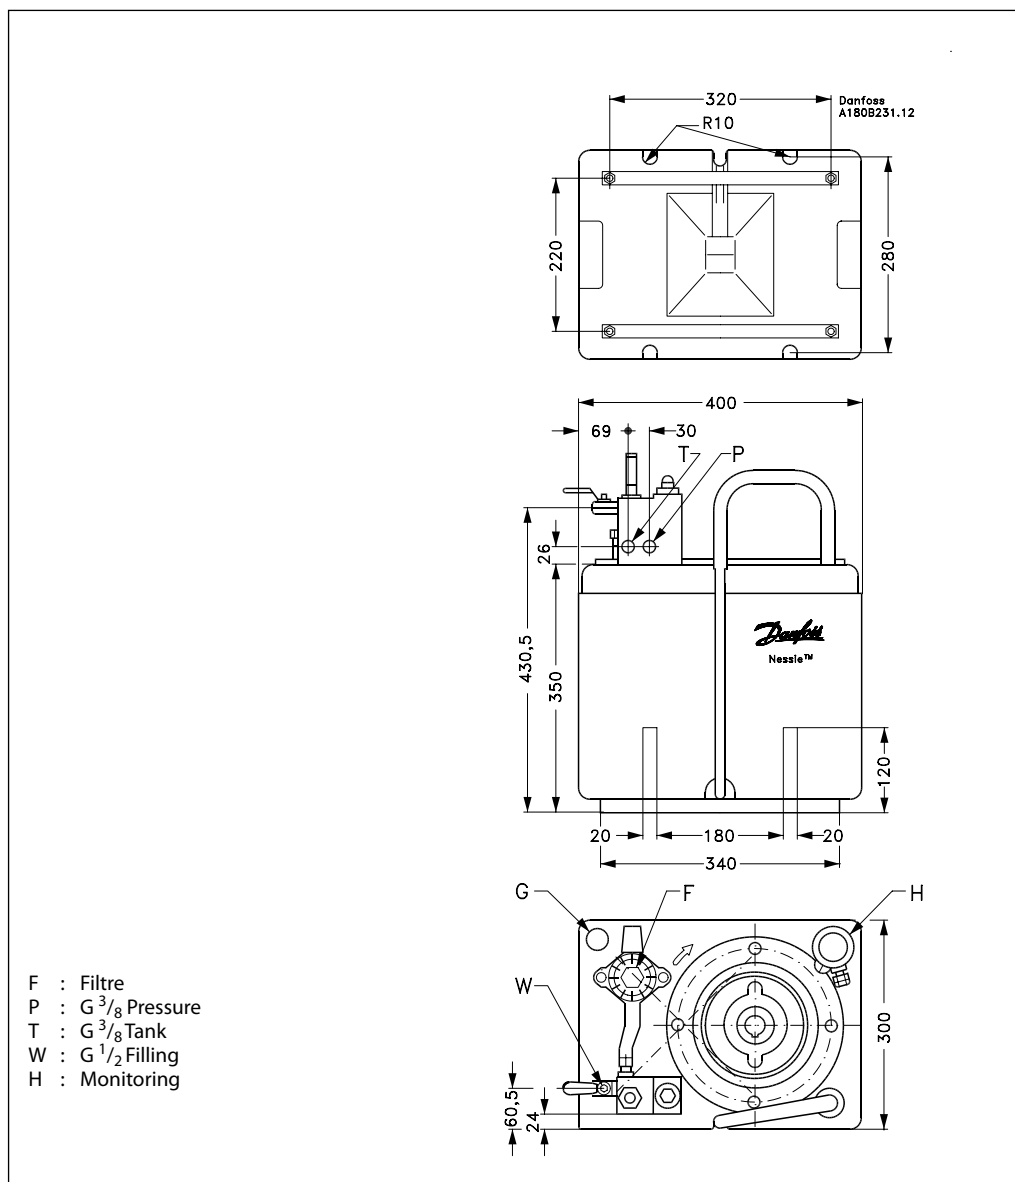

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.



DK-6430 Nordborg
Denmark