


060R9750


KP 1, 2, 5, 7: R 12, R 22, R 500, R 502
KP 1A, 5A: R 717 (NH₃)





KP 1, 2, 5, 7











KP 1, 2, 5, 7









KP 1A, 5A

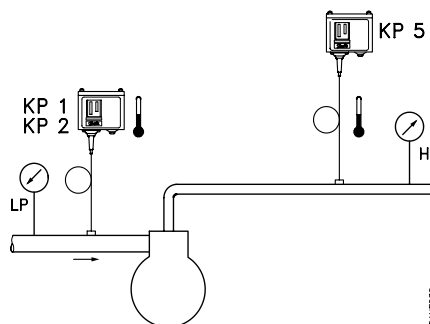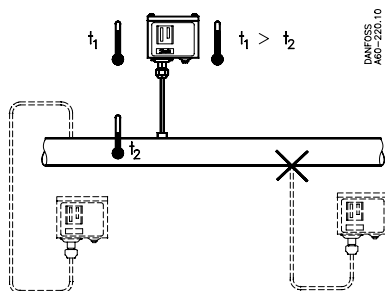

KP 1, 2,
KP 5, 7

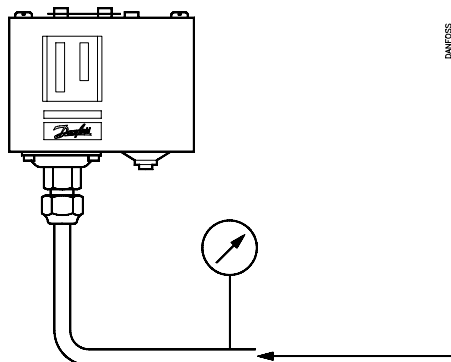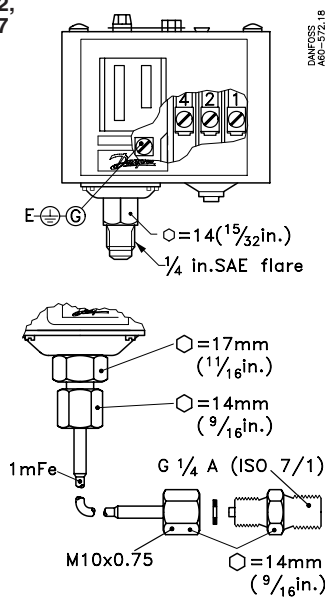

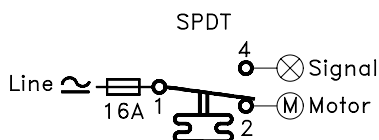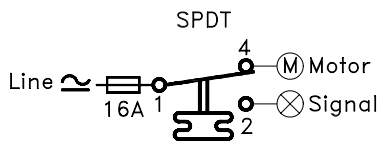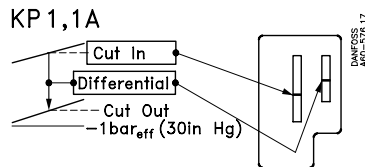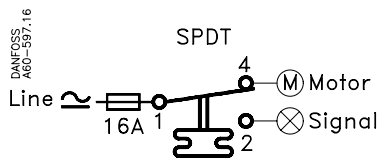

Electrical rating - General

LR 112A	AC 1: 16A AC 3: 16A AC 11: 10 A	400 V~	DC 11 12 W 220 V~
---------	---------------------------------------	--------	-------------------------


When used acc. to UL regulations

UL Listed refrigeration controller 61B5


Voltage	FL	LR	Resist.	Pilot
AC	DC	A	load	duty
240		8	48	8A
120		16	96	16A
	240			12W

Use copper wire only
Tightening torque 20lb.in.

Automatic reset

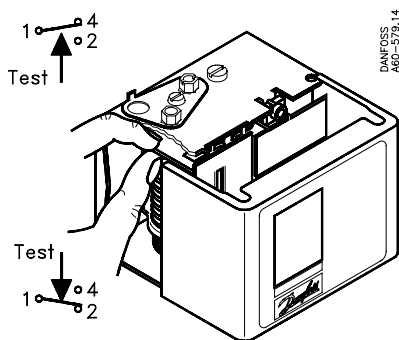


KP 1, 1W, 2, 5, 5A, 7W

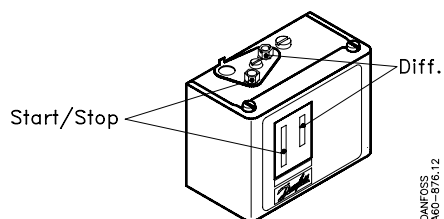


KP 1, 1A, 2, 5, 5A, 7W

Manual reset

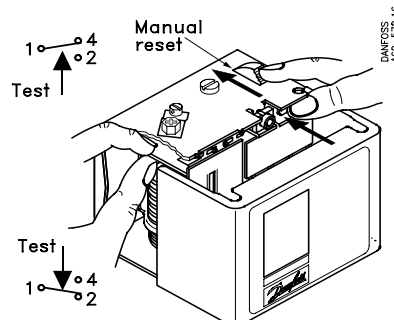

KP 1, 1A, 5, 5A, 7B, 7S



KP 1, 1A, 5, 5A, 7B, 7S

Diff.
KP 1, 1A: 0.7 bar (10 psi)
KP 5, 5A: 3 bar (43 psi)
KP 7B, 7S: 4 bar (58 psi)

Type	Range	MWP/PB
KP 1	-0.2 → 7.5 bar	250 psi / 17 bar
KP 1, reset	-0.9 → 7 bar	250 psi / 17 bar
KP 1W	0.5 → 3 bar	250 psi / 17 bar
KP 2	-0.2 → 5 bar	250 psi / 17 bar
KP 5, 7W	8 → 32 bar	460 psi / 35 bar
KP 5, reset	8 → 32 bar	460 psi / 35 bar
KP 7B, 7S	8 → 32 bar	460 psi / 35 bar

