



Eliminator®

**Replaceable
filter drier core**
for DCR 0485 to 19217
and similar 4 3/4 in. shells


023R9799

RI6BG702



Warning!
System lines must be
de-pressurized before
service.

35 Nm

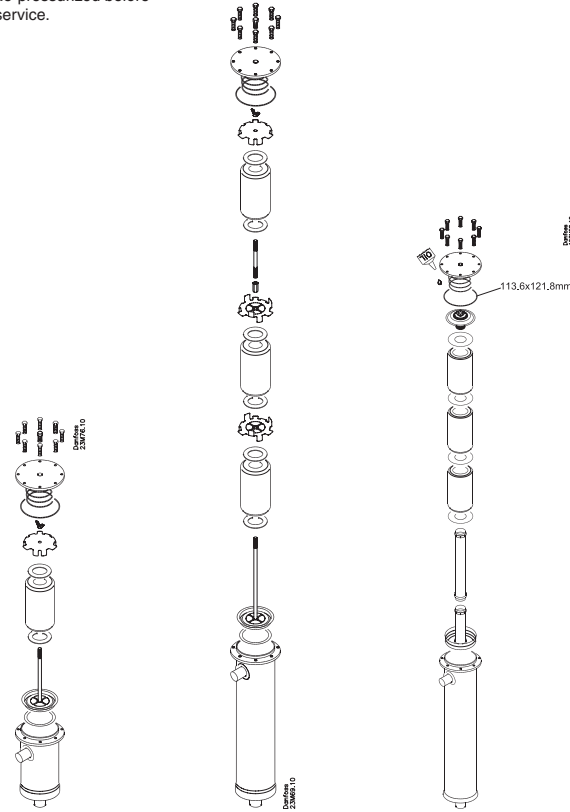

48-DM

Provides high moisture adsorption
at low and high condensing
temperatures
For liquid or suction line with
fluorinated refrigerants.

48-DC

Adsorbs moisture and acid in
system throughout the whole
temperature range
For liquid or suction line in plant with
fluorinated refrigerants.

48-DA

High acid adsorption and standard
water adsorption
For suction line with fluorinated
refrigerants.

48-F

Retains dirt particles larger than
15 micron.
For liquid or suction line with
fluorinated refrigerants.

Caution:
Do not open the tin until
filter replacement

Note: Cores in tins retain their adsorption capacity indefinitely

