

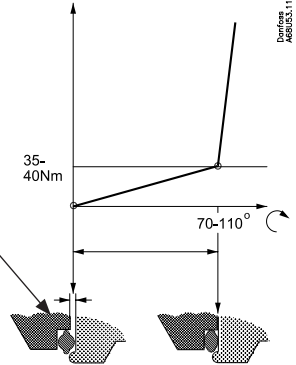


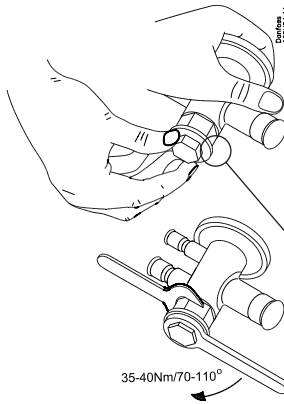


TUA/TCAE

068R9549

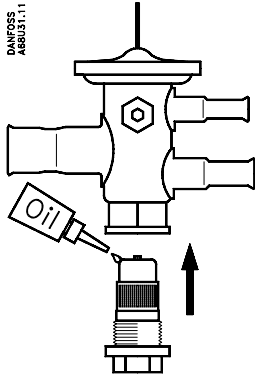


068R9549


1

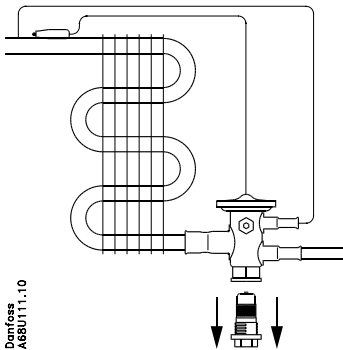


2

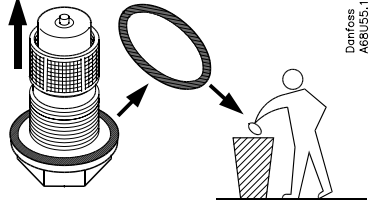


3




4




5






Example: TUA



Example: TCAE



Range N: $-40 \rightarrow +10\text{ }^{\circ}\text{C} / -40 \rightarrow +50\text{ }^{\circ}\text{F}$

Orifice no.	Rated capacity in kW					Rated capacity in tons (TR)					Code no.
	R 22	R 134a	R 404A	R 407C	R 507	R 22	R 134a	R 404A	R 407C	R 507	

TUA

0	0.60	0.47	0.47	0.63	0.45		0.17	0.13	0.13	0.18	0.13		068U1030
1	0.9	0.7	0.70	0.92	0.66		0.25	0.19	0.19	0.26	0.19		068U1031
2	1.3	1.0	1.0	1.4	1.0		0.36	0.28	0.28	0.38	0.27		068U1032
3	1.8	1.4	1.4	1.9	1.3		0.50	0.39	0.39	0.53	0.38		068U1033
4	2.6	2.1	2.1	2.8	2.0		0.75	0.59	0.60	0.80	0.57		068U1034
5	3.5	2.7	2.8	3.8	2.7		1.00	0.78	0.79	1.1	0.76		068U1035
6	5.3	4.1	4.2	5.7	4.0		1.5	1.2	1.2	1.6	1.1		068U1036
7	7.0	5.5	5.6	7.5	5.3		2.0	1.6	1.6	2.1	1.5		068U1037
8	11.0	8.2	8.4	11.0	8.0		3.0	2.3	2.4	3.2	2.3		068U1038
9	16.0	12.0	12.0	17.0	12.0		4.5	3.5	3.5	4.8	3.4		068U1039

TCAE

1	17.5	12.0	13.5	19.0	13.0		5.0	3.5	3.8	5.4	3.8		068U4100
2	21.0	14.5	16.0	23.0	16.0		6.0	4.1	4.5	6.5	4.5		068U4101
3	26.5	18.0	20.0	28.5	20.0		7.5	5.2	5.7	8.1	5.6		068U4102

Range B: $-60 \rightarrow -25\text{ }^{\circ}\text{C} / -75 \rightarrow -15\text{ }^{\circ}\text{F}$

Orifice no.	Rated capacity in kW				Rated capacity in tons (TR)				Code no.
	R 22	R 404A	R 407C	R 507	R 22	R 404A	R 407C	R 507	

TUA

0	0.52	0.36	0.46	0.39		0.15	0.10	0.13	0.11		068U1030
1	0.68	0.50	0.58	0.53		0.19	0.14	0.16	0.15		068U1031
2	0.85	0.64	0.70	0.70		0.24	0.18	0.20	0.20		068U1032
3	1.2	0.89	1.0	1.0		0.34	0.25	0.28	0.28		068U1033
4	1.8	1.3	1.4	1.4		0.50	0.37	0.41	0.41		068U1034
5	2.3	1.8	1.9	1.9		0.66	0.50	0.55	0.55		068U1035
6	3.5	2.7	2.9	2.9		1.0	0.75	0.82	0.82		068U1036
7	4.7	3.5	3.9	3.9		1.3	1.0	1.1	1.1		068U1037
8	7.1	5.3	5.8	5.8		2.0	1.5	1.6	1.7		068U1038
9	10.4	7.8	8.5	8.6		2.9	2.2	2.4	2.4		068U1039

TCAE

1	12.5	10.9	10.3	19.2		3.6	2.7	3.1	2.9		068U4100
2	16.4	14.1	13.5	25.0		4.7	3.5	4.0	3.8		068U4101
3	21.6	19.4	18.0	33.2		6.1	4.6	5.5	5.1		068U4102