


023R9502

DN: R 12, R 22, R 502 et al.  
 DU: R 134a, R 404A, R 407 C, R 410 A, R 507 et al.  
 PB / MWP = 35 bar (500 psig)  
 $P_{test} = \text{max. } 45 \text{ bar (650 psig)}$

023R9502

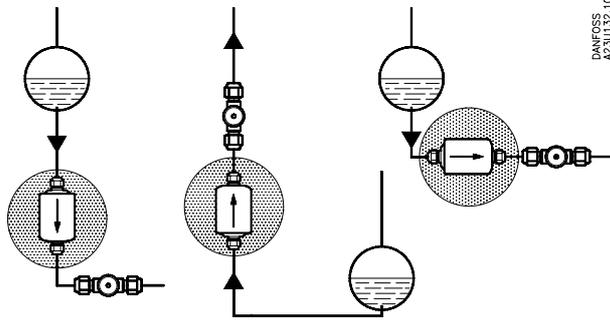

DANFOSS  
A23U132.10

**Note!**

Max. working pressure (PB/MWP) shall not be less than the pressure outlined in sect. 8.2 of ANSI / ASHRAE 15 for the refrigerant used in the system.  
 After charging, the system shall be marked with the refrigerant and the oil used.

DANFOSS  
A23U114.11

