

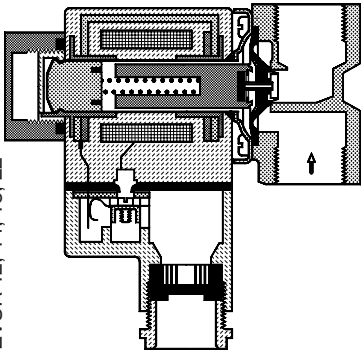
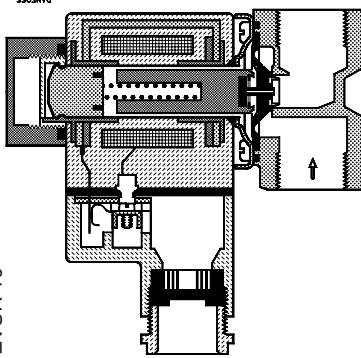


068R9545



EVSR 10



EVSR 12, 14, 18, 22




068R9545

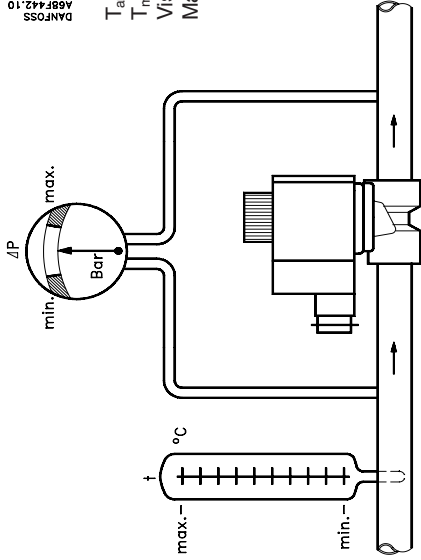


DANFOSS
A68F42.10

T_{amb} = +50°C max.
 T_{medium} = -35 → +60°C
 Viscosity = 50 cST. max.
 Max. test pressure = 16 bar



DANFOSS
A68F43.10

EVSR	Nm	kpm	ft-lbs
10	1.4	0.14	1.0
12	2.8	0.28	2.0
14	2.8	0.28	2.0
18	4.5	0.45	3.2
22	4.5	0.45	3.2



DANFOSS
A68F44.10

NC	ΔP bar	10 W a.c.		12 W a.c.		20 W d.c.	
		min.	max.	min.	max.	min.	max.
EVSR 10, 12 14, 18, 22	0.1	5.0	0.1	5.0	0.1	5.0	5.0

