
Danfoss

INSTRUCTIONS

Replaceable filter drier core

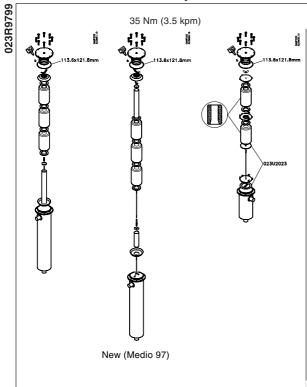

48-DN High capacity core with extra high drying capacity.

capacity.
For liquid or suction line in plant with R 22, R 134a, R 404A or other fluorinated refrigerants.

48-DU Molecular Sieves core, developed and designed for plant with polyolester oils. Prevents additive depletion. For liquid or suction line with HFC.

48-DA Burnout core with high acid adsorption and standard drying capacity for clean-up after burnout.
For suction line with R 22, R 134a, R 404A or other fluorinated refrigerants.

48-F Filter insert for dirt retention in liquid or suction line in plant with fluorinated refrigerants.

RI.6B.G5.02

81