

OEM Pressure transmitter with dual output Type MBS 1300

Introduction



MBS 1300 pressure transmitters with dual output signal.

This is a combination of:

- Ratio-metric voltage signal on pressure + pressure switch
- Absolute voltage signal on pressure + pressure switch
- Ratio-metric voltage signal on pressure + temperature output
- Absolute voltage signal on pressure + temperature output

Features

- Designed for use in severe industrial OEM applications
- · Output signals
 - Pressure + switch
 Pressure: 0-5 V, 1-5 V, 1-6 V, 0-10 V, 10-90%
 ratiometric voltage. Switch: 0/5 V logic switch
 - Pressure + temperature Pressure: 1-5 V, 1-6 V, 10-90% ratiometric voltage. Temperature: 1-5 V, 1-6 V, 10-90% ratiometric voltage
- For medium and ambient temperatures up to 125°C
- Wetted parts made of stainless steel
- A wide range of pressure and electrical connections
- EMC protection up to 100 V/m
- · UL 508 recognized
- CE marked

Description

The compact OEM pressure transmitter MBS 1300 is designed for use in industrial applications, where a combination of pressure signal and pressure switch or temperature signal is requested. It offers a reliable performance even under harsh

environmental conditions. Excellent vibration stability, robust construction, and a high degree of EMI protection equip the pressure transmitter to meet the most stringent industrial requirements.

Application example

- Indication for overheated installations like pumps and motors
- Indication of oil temperature in hydraulic circuits like transmission
- Warning at excessive or inadequate pressure
- Alarm function

Please notice that neither pressure switch feature nor temperature signal feature may not be used for safety cut-out.



OEM pressure transmitters with dual output, type MBS 1300

Technical data

Performance (EN 60770)

Accuracy (incl. nonlinearity, hysteresis and repeatability)	±0.5% FS
Thermal zero point shift	<± 0.15% FS/ 10K
Thermal span shift	<±0.15% FS/ 10K
Response time (10-90%)	1 ms
Overload pressure (static)	see table below
Burst pressure	See table below
Durability, P: 10-90% FS	>10 ×10 ⁶ cycles

Overload and burst pressure


Nominal pressure [bar]	6	10	16	25	40	60	100	160	250	400	600	1000*	1600*	2200*
Overload pressure	21	30	48	70	140	140	200	320	500	800	1400	2000	2500	3000
Burst pressure	280	400	640	700	1400	1400	2000	1600	2500	4000	>4000	>4000	>4000	>4000

^{*} Only available with M12 x 1.5P high pressure port, type FC06.

Electrical specifications

Pressure output signal (Short-circuit protected)	0 to 5, 1 to 5 1 to 6 V	0 to 10 V	10 to 90% ratiometric
Supply voltage [UB], polarity protected	8 to 30 V	12 to 30 V	5 V ±0.5 V
Supply - current consumption	4.5 mA	4.5 mA	4.5 mA
Output impedance	≤90 Ω	≤90 Ω	≤90 Ω
Load [R ₁] (connected to 0 V)	RL≥10 kΩ	RL≥ 10 kΩ	RL≥5 kΩ
Load $[R_L]$ (connected to + V)	Not possible	Not possible	RL≥5 kΩ

Wiring

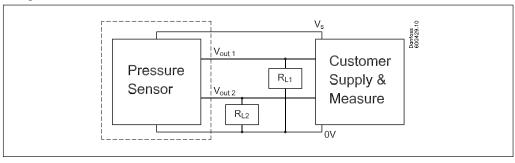



Pressure Output + Switch Function
The load R_{L1} connected on V_{out1} indicates the ordinary pressure transmitter signal, being either 10-90% V_s (ratio-metric) or one of the absolute voltage signals 0-10 / 0-5 / 1-6 / 1-5 V d.c.

The load $R_{\rm L2}$ connected on $V_{\rm out2}$ indicates a second configurable voltage output available on 4-pin connectors.

The pressure switch output stage is represented by 0 and 5 V irrespective of the supply voltage. It can be set to switch from 0 to 5 V d.c. on pressure rise or switch from 0 to 5 V d.c. on pressure fall.

The target switch-point is set at the calibration at Danfoss and is not adjustable on-site.

The differential is fixed with approx. 1% of Full Span (FS).

The sink/source capability is limited to 2.5 mA.

Parameter	Min	Тур	Max	Units	Comments
Vout2 'Logic Level' - Ab- solute	0		5	V	Vout2 voltage 'logic level' are independent of the Vout1 calibration range
Vout2 'Logic Level' - Ratio- metric	0		V _s	V	Vout2 voltage 'logic level' are independent of the Vout1 calibration range
Vout2 Calibration Accuracy (Including Design Hyster- esis)	-2		+2	%FS	Accuracy to the pressure-switch target. Hysteresis prevents ringing around the switch- point.
Vout2 Thermal Accuracy		±0.15		%FS/ 10°C	Accuracy mostly determined by actual Vout1 thermal offset and thermal span performance

Temperature signal is not available when the pressure switch feature is selected.

Pressure Output + Temperature Output The load R_{L1} connected on V_{out1} indicates the ordinary pressure transmitter signal, being either 10-90% V_s (ratio-metric) or one of the absolute voltage signals 1-6 and 1-5 V d.c.

The load $R_{\rm L2}$ connected on $V_{\rm out2}$ indicates a second configurable voltage output available on 4-pin connectors.

The temperature output V_{out2} depends on the pressure transmitter signal (see scheme below).

It is a fully continuous signal that corresponds directly to the temperature of the pressure sensor element being in contact to the pressure fluid.

The temperature range is calibrated at Danfoss according to the requirements given by the user and is consequently not adjustable on-site.

Max temperature range :-40°C to 125°C. Min temperature range : 0°C to 80°C.

Parameter	Min	Тур	Max	Units	Comments
Vout2 Output Voltage - Absolute	0.1		12	V	Typical output ranges as per Vout1 table. On 0-5 V and 0-10 V pressure tranducers zero signal will be 0.1 V when temperature output is activated.
Vout2 Output Voltage - Ratio-metric	5		95	%Vs	Ratio-metric to supply voltage V _s
Vout2 Calibration Accuracy	-0.50		0.50	%FS	Room temperature set-point
Vout2 Thermal Total Error Band		±3		%FS	Indludes thermal span and non-linearity error between -20°C and +100°C. Note: Vout2 is NOT a measure of the ambient temperature

Pressure switch is not available when the temperature feature is selected.

IC.PD.P21.H1.02

OEM pressure transmitters with dual output, type MBS 1300

Environmental conditions

Medium temperature range		$-40^{\circ}\text{C} \rightarrow +125^{\circ}\text{C}$		
Ambient temperature range		-40°C → +125°C		
Compensated temperature range		-40°C → +125°C		
Transport temperature range		-40°C → +125°C		
EMC - Emission		EN 55022		
EMC - Immunity RF field 100 V/m, 26	iMhz-1Ghz	EN 61000-6-2, EN 61000-4-6, EN 61000-4-3		
DC isolation		250 V		
Vibration stability	20g, 10-2000 Hz, sinus	EN 60068-2-6		
Shock resistance	100 g	EN 60068-2-27		
Enclosure (depending on electrical c	onnection)	See page 6		


Mechanical conditions

Materials	Wetted parts	17-4PH	
	Enclosure	AISI 304 or plastic	
	Pressure connection	17-4PH	
	Electrical connection	See page 6	

Installation guide line with temperature function

The signalled temperature represents the temperature on the pressure sensor element inside the transmitter. Therefore the accuracy of the temperature signal depends on a suitable installation of the pressure transmitter.

To get the fastest response time it is recommend installing the pressure transmitter in a 45 angle relative to the flow or in a bend of the piping; see below. In this way the heat is "pumped" into the transmitter interiors.

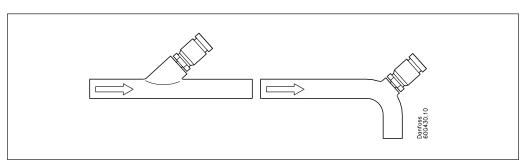


Also it is advisable to insolate the pressure transmitter from the ambient temperature or to prevent airflow around the transmitter (e.g. by motor hood).

Ordering of adaptor code numbers


From pressure connection	To pressure connection	Code no Single pack
	7/16-20 UNF - flare	063G0300
	7/16-20 UNF - 2A	063G0301
G 1/4" DIN 3852	9/16-18 UNF - 2A	063G0302
	1⁄4" NPT	063G0303
	R 1/4 "	063G0304

OEM pressure transmitters with dual output, type MBS 1300

Ordering of versions

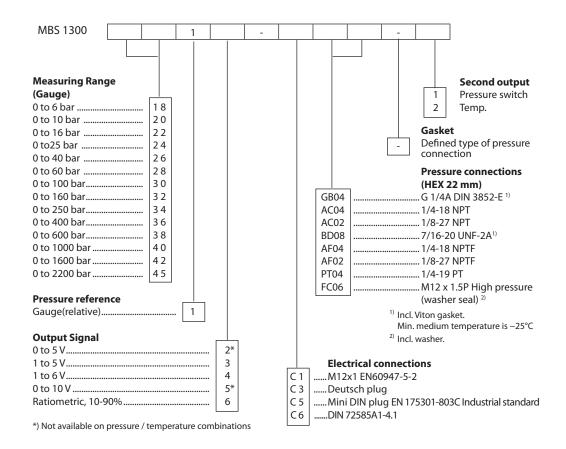

Dimensions/Combination

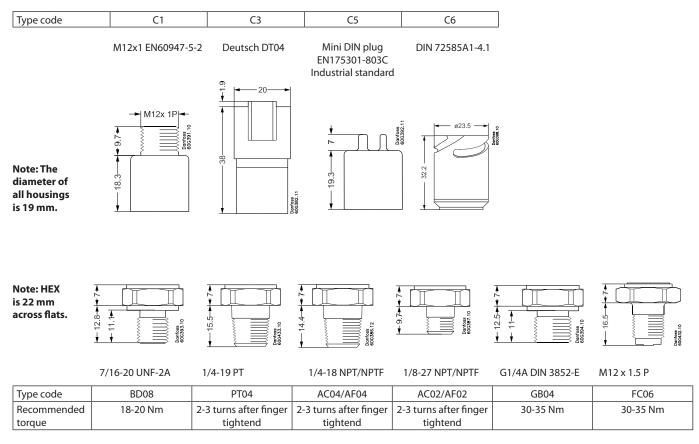

IC.PD.P21.H1.02 5



Electrical connections

Type code page 5							
C1	C3	C5	C6				
M12x1 EN60947-5-2	Deutsch DT04	Mini DIN plug	DIN 72585A1-4.1				
2 Key 3 (o o o) 1 soojung 4 soojung 4		EN175301-803C Industrial standard	2 Key 1 11.79 Kes2009 3				
Enclosure							
IP 67	IP 67	IP40	IP67				
Material							
SS, PBT 30% GFR	Glass filled PBT 30% GFR	304 ss, PBT 30% GFR	Glass filled PBT 30% GFR				
Gold (Au) plated	Gold (Au) plated	Tin (Sn) plated	Gold (Au) plated				
Electrical connections,							
Pin 1: + supply	Pin 1: ÷ supply	Pin 1: Output 1	Pin 1: + supply				
Pin 2: Output 1	Pin 2: + supply	Pin 2: + supply	Pin 2: ÷ supply				
Pin 3: ÷ supply	Pin 3: Output 2	Pin 3: Output 2	Pin 3: Output 1				
Pin 4: Output 2	Pin 4: Output 1	Pin 4: ÷ supply	Pin 4: Output 2				